



Professional Tyre Tools & Equipments Since 1991

# GARAGE EQUIPMENT & TOOLS FOR COMMERCIAL VEHICLES CATALOGUE 2021-2022



MADE IN  
**ITALY**

**Technology Behind the  
Winning POWER**

One Stop Solution for  
**Garage Equipment and Garage Tools**

**Sarveshwari Technologies Ltd.**

[www.garageequipments.com](http://www.garageequipments.com)



Quality Reliability Service...



# ENGINEERING INNOVATION DESIGN

**Sarveshwari** popularly known by its brand name **sarv** is recognized worldwide as the leader in providing top quality garage tools and accessories for automotive & tyre service industry. We have been delivering niche workshop tools and accessories in more than 70 countries in 6 continents for more than 27 years.

We **manufacture** a large range of Wheel Balancing, Alignment & Tyre Changing Accessories, to suit majority of Garage Equipments like Wheel Balancing Machines, Wheel Alignment Machines & Tyre Changing Machines from all over the world. Our experience in development and manufacturing of products, has helped us to become a reliable & the preferred partner for OEMs worldwide. Other **sarv** products dominating the automotive after market & Tyre Industry include Rubber Pads, Tyre Service / Repair / Valve Tools.

**Proudly we are the ONLY company in India to manufacture and export such wide range of Wheel Service Accessories.**

**DOMESTICALLY** **sarv** is known for its world class quality Garage Equipments and their efficient after sales service. In the domestic market too, like the rest of the world, **Sarveshwari** is recognized as the leader for good quality tyre service tools and equipments.

We offer products from world class leaders namely CEMB-Italy, Space- Italy to distribute & service their Wheel Alignment Machines, Wheel Balancing Machines, Tyre Changing Machines, Vehicle Lifts, Nitrogen Generators and other Garage Equipments.

With wide range of international client base network, consider **Sarveshwari** as your single point service provider for all your workshop and tyre related problems.



## **Sarveshwari Group**

### **Sarveshwari Engineers**

Manufacturers and Exporters of Garage Tools and Accessories

[www.sarveshwari.com](http://www.sarveshwari.com)

### **Sarveshwari Technologies Ltd.**

Workshop Tools & Equipments

[www.garageequipments.com](http://www.garageequipments.com)

# RANGE OF

# GARAGE EQUIPMENTS

FOR



## TABLE OF CONTENT

WHEEL ALIGNMENT EQUIPMENT	02	OIL & GREASE CONTROL	19
WHEEL BALANCING EQUIPMENT	04	DIAGNOSTIC EQUIPMENT	21
TYRE CHANGING EQUIPMENT	04	WHEEL NUT RUNNERS	22
EXHAUST EXTRACTION SYSTEMS	06	TYRE MOUNT DE-MOUNT TOOL KITS	23
DPF CLEANING MACHINE	08	OTR BEAD BREAKER / TYRE PASTE AND BRUSHES	25
VEHICLE LIFTING EQUIPMENT	09	TYRE SERVICE TOOLS	26
ENGINE AND JIB CRANE	10	TYRE VALVE TOOLS	29
GEAR BOX TROLLEY	11	TYRE PRESSURE GAUGES	30
HYDRO PNEUMATIC JACK	12	TYRE REPAIR TOOLS & KITS	32
TYRE CARE EQUIPMENT	13	TYRE REPAIR EQUIPMENT	33
NITROGEN GENERATOR & INFLATORS	16	TYRE & TUBE REPAIR PATCHES	34
WHEEL CHANGE KIT	17	UNIVERSAL TYRE REPAIR KIT	36
WORKSHOP EQUIPMENT	18		



# DWA1000WE

## Wheel Alignment Machine

8-CCD Sensor Truck Alignment System

### Unique Features :

- Wheel alignment system for trucks and buses. Unit complete with cabinet, computer control system, sensors and all accessories required for alignment operations.
- CCD (Charged Couple Device) sensor technology, featuring state-of-the-art electronic componentry, enables a quick and accurate measurement of all alignment parameters by simply following a procedure field tested through many years of experience.



#### Database :

The CEMB database contains more than 55,000 vehicles and is constantly updated.



#### Lithium Batteries :

The batteries are immune to the "memory effect" and can be recharged at any time.



#### BT² Radio Communication 2,4 GHz :

The radio communication between sensors and computer uses a frequency of 2,4 GHz.



#### Featherweight Sensors :

Featherweight sensors: ONLY 2.8 KG



#### Dedicated Electronics :

The system features an industrial type computer, Windows based, solid state SSD Sata, USB interface. No moving parts (DVD/CD) that can cause problems.



#### User friendly Software :

Simple and user-friendly software  
MAKES WORK EASY



### Standard Equipment



- DWA cabinet, 19" TFT monitor, colour printer, keyboard, mouse.
- Industrial PC, with WINDOWS operating system
- Four car measuring heads with Lithium batteries, 8 CCD sensors, BT2 technology
- Four 4-point clamps 12"-24"
- c/w universal grips, L 45mm + metallic grips with reference surface, L48mm
- Brake pedal lock and steering lock
- Wheel alignment software and database for CAR.



Simple and user-friendly software



Adjust two axles in one screen



Step by step procedure up to 7 axles

# ALADIN BTH (ART86BTH/ART98BTH)

MADE IN ITALY

## Wheel Alignment Machine | Space-Italy

for Commercial Vehicles

### Unique Features :



#### 6CCD Alinger/ 8CCD Alinger.

- Simpler and more modern technology grants better reliability and less down-time for the end user.
- Bluetooth transmission between front heads and cabinet for faster information transfer
- Special supports on the side of the control unit permit housing and recharging the measuring-head batteries.
- LEDS on the head inform the operator when adjustment angle is within specification range.
- Data management and display program in windows environment.
- Ability to operate the system from any head. Often you are far from the console and this slows down the operating speed.
- Customer data bank for recording jobs with search by customer name or vehicle plate number.
- Build in vehicle database of different manufacturers worldwide with provision to add and edit.
- Faster and more reliable data transmission through Bluetooth (radio can be a problem on large vehicles).
- ART98BTH and ART86BTH represent the technology in truck alignment. These new development aligners feature state of the art components.
- Measurement of multiple axles vehicles, thanks to an extremely easy-to follow procedure.
- Software is just as complete but is much simpler to use and has a faster flow for the operator.
- Software is just as complete but is much simpler to use and has a faster flow for the operator.
- User's instructions by animated graphics for an immediate operation.
- Data management and display program in WINDOWS environment. Data bank with vehicle data sheets already
- Customer data bank for recording jobs with search by customer name or vehicle plate number.
- Summary and comparison of diagnosis/repair values on a single screen.

Technical Data		
	Accuracy	Total measuring range
<b>Front Axle</b>		
Total toe	+/- 3'	+/- 5°
Partial toe	+/- 1.30"	+/- 2°30'
Set-back	+/- 3'	+/- 5°
Camber	+/- 3'	+/- 10°
Caster	+/- 5'	+/- 18°
King pin	+/- 5'	+/- 18°
<b>Rear Axle</b>		
Total toe	+/- 2'	+/- 5°
Partial toe	+/- 1'	+/- 2°30'
Set-back	+/- 2'	+/- 5°
Total toe	+/- 2'	+/- 5°
Camber	+/- 2'	+/- 10°
Thrust angle	+/- 2'	+/- 5°



NOTE: ART86BTH RO-6CCD Sensors  
ART98BTH RO-8CCD Sensors

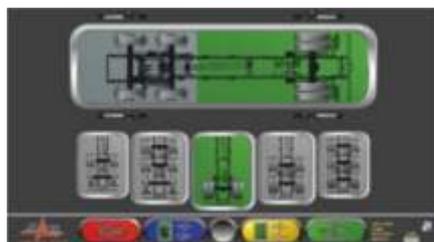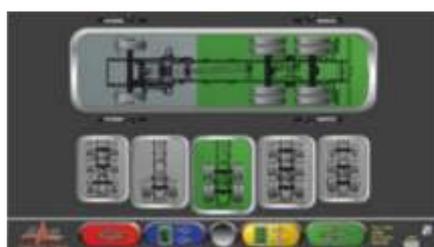

# C212

## Wheel Balancing Machine

for Commercial Vehicles

MADE IN **ITALY**

Technical Data	
Max power consumption	1.1 Kw
Balancing speed	<100rpm
Balancing accuracy	10g
Cycle time for wheel	8-20sec
Diameter setting range	10"to 30"
Max wheel diameter	1300mm
Max wheel weight	250Kg
Max air pressure	8-10bar

### Unique Features :

- Fully automatic cycle with braking.
- Electro-pneumatic stationary brake, operated through control panel, to ease locking and unlocking wheels on adapters as well as for counterweights fitting
- Automatic input of wheel distance and rim diameter by simply pulling out the gauge, without pressing any button. Automated detection of alloy rims.
- Optimization program to compensate the tyre unbalance with the rim unbalance.
- Unbalance tolerance threshold (adjustable).
- Self diagnosis and self calibration.
- Possibility of showing simultaneously static and dynamic unbalance.
- ALU-S function, for alloy rims or special shape rims.
- SPLIT program to divide counterweights among spokes of alloy rims. Innovative CEMB software system which simplifies the use without any need to input the number of spokes.



# SCB-322

## Wheel Balancing Machine | sarv

for Commercial Vehicles

Technical Data	
Power supply	220V/230V-1ph
Motor power	250W
Shaft diameter	40mm
Max wheel weight	200kg
Wheel diameter	1200mm
Rim diameter	10" - 32" (255 - 810 mm)
Wheel width	1.5" - 20" (39 - 510mm)
Balancing precision	± 10g
Cycle time	15s
Balancing speed	90 rpm for truck mode
Noise level	< 70 dbA
Air supply	8 -10 bar



### Unique Features :

- Automatic braking after spin.
- Automatic start/stop when the hood is lowered/raised.
- STOP pushbutton to stop the machine immediately.
- Static and dynamic balancing modes.
- Four ALU balancing modes.
- Rapid optimization (OPT).
- Self-diagnosis.
- Self-calibration.
  - Exceptional stability in reading the unbalance between planes.
- Display in grams or ounces, in mm or inch. No anchor-down installation.
- For Balancing Both Truck & Car Wheels.



## TYRE CHANGING EQUIPMENT

# DL-1500

## Tyre Changing Machine | sarv

for Truck & Bus Tyres



### Unique Features :

- Apply to rim dimension between 14" to 26".
- Lifting arm and universal chuck are all driven by the hydraulic pressure.
- Locking jaws with different gripping possibilities.
- Electrical control, move back and forth.
- Universal tool carrier arm with pendulous bead braking disc and hook.
  - Movable low voltage control unit.
  - Operation voltage 24V, safe and stable.

Technical Data	
Rim diameter	14" to 26"
Max wheel weight	500Kg
Max wheel width	780mm
Max wheel dia	1600mm
Hydraulic pump motor	1.5Kw, 400V, 3PH, 50Hz
Gearbox motor	2.2Kw, 400V, 3PH, 50Hz
Operating pressure	130bar
Bead breaking force	2500Kg
Operation control voltage	24V
Machine weight	570Kg



# SCM 2700 T

**Tyre Changing Machine** |   
for Truck & Bus Tyres

**Unique Features :**

- Two speed hydraulic chuck, with 5 different rim locking position.
- Easy to fit and remove all types of truck and bus tubeless and tube type tyres on all types of single piece, two piece and three piece rims without damaging the tyre bead.
- Mobile cable control unit.
- Hand movable tool holder.



Technical Data	
Rims from	13" - 27"
Max. wheel weight	1500kg
Max. wheel diameter	1600 mm (63")
Max. wheel width	780 mm (30½")
Hydraulic unit motor power	1.5kw/400V
Chuck motor power	1.3/1.8kw-400V 3ph
Operating pressure	0 - 130 bar
Bead breaker force	1865 kg

# TC-2500

**Automatic Tyre Changing Machine** |   
for Industrial, Agricultural and Earthmoving Tyres



Technical Data	
Rim diameter	14"-42"
Max. wheel weight	1600kg
Max. wheel width	1050mm
Max. tyre diameter	2300mm
Hydraulic pump motor	2.2kW 380V-3Ph-50Hz
Gearbox motor	2.2kW 380V-3Ph-50Hz
Bead breaker force	3300kg
Operation control voltage	24V
Machine weight approx	758kg
Overall dimensions approx	2500x2000mm
Power	3Ph, 400V, 50Hz
Gross weight	850kg
Outside dimension (LxWxH)	2130x1850x1090mm

**Unique Features :**

- Motorized Universal Tyre Changer for Truck , Bus, Industrial, Agricultural, and Earthmoving wheels for Rim sizes from 14" to 42"

# TC-3500

**Super Tyre Changer** |   
for Industrial, Agricultural and Earthmoving Tyres



Technical Data	
Rim capacity	14"-46"
Rim capacity with extensions	14"-56"
Max. wheel diameter	2500mm
Max. wheel width	1200mm
Max. wheel weight	2000kg
Hydraulic unit motor	2.4/3.0 Kw
Gearbox motor	2.4/3.0 Kw
Machine weight approx	1145 kg
Power	3Ph,400v, 50HZ

**Unique Features :**

- Super truck changer has been specifically designed to mount and demount truck, bus, tractors and earthmoving vehicles tyres with rim capacity 14"-56"
- It has bi-directional chuck with 2 rotational speeds.

# HOSE REEL EXHAUST EXTRACTION SYSTEMS

For BS6 Workshops For Both Regeneration and Working Bay upto 700°C

**Unique Features :**

- SARV's Vehicle exhaust extraction system extracts exhaust from the vehicle muffler and prevents toxic high temperature exhaust fumes from being dispersed in the workshop environment and becoming a danger for the operator & his health.
- Specially designed For BS6 Workshops For Both Regeneration and Working Bay upto 700°C



Two type of **EXHAUST EXTRACTION SYSTEMS**

- Hose Reel Exhaust Extraction System-200°C (LTES2-10M)
- Hose Reel Exhaust Extraction System-700°C (HTES7-10M)
- Mini Set Exhaust Extraction System-200°C (LTESM2-10M)
- Mini Set Exhaust Extraction System-700°C (HTESM7-10M)

*Designing a HEALTHIER WORK ENVIRONMENT*

**DESIGN AND MANUFACTURED** sarv Professional Tyre Tools & Equipments Since 1991

**Advantages :**


- Coupled driven motor
- Stainless steel fan construction
- End to end installation support
- European made hoses
- Speedy after sales service
- Patented universal trolley
- Crompton greaves motor

## sarv Patented Universal Trolley

**Suitable for all Vehicles :**

- Horizontal Exhaust
- Vertical Exhaust
- Centre Tailpipe Exhaust

**SARV-150AU**

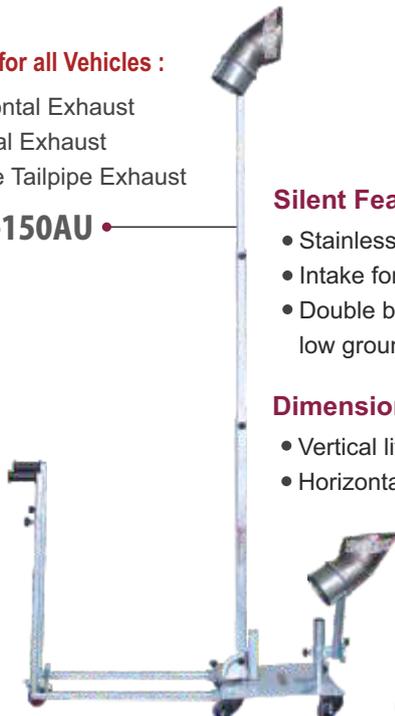


**Silent Features**

- Stainless steel suction
- Intake for high temperature
- Double braking wheel low ground clearance

**Dimensions**

- Vertical lifting height : 3650mm
- Horizontal length : 1400mm



**IN HOUSE MANUFACTURING**

## MINI SET EXHAUST EXTRACTION SYSTEMS

For BS6 Workshops For Both Regeneration and Working Bay upto 700°C

The MINISSETS are the simplest expression of a fixed gas extraction system.

Consist of :

- Centrifugal Fan,
- Hose
- Nozzle for intercepting the gases



VIDEO DEMO



Clean Air at Work



## Installation Images





# STL-DCE (L) DPF CLEANING MACHINE

Fully Automatic System, Cyclone System applied | 

**Unique Features :**

- Fully Automatic Chemical Cleaning.
- Pressure Cleaning.
- Differential Pressure Cleaning.

Technical Data	
Product Name	DPF Cleaner - STL-DCE (L)
Set numbers of times	5~40 times
Air time setting	0~30 second
Water time setting	0~30 second
Input voltage	220V 50/Hz phase
Weight	100 kgs
Size	1265x600x1210 (mm)

DPF equipment operated manually and automatically.


## Applied Cyclone System

which doesn't splash water.

### DIFFERENTIAL PRESSURE TEST USING DIFFERENTIAL PRESSURE SENSOR HOSE




### DISPLAY DIFFERENTIAL PRESSURE BY WAVEFORM

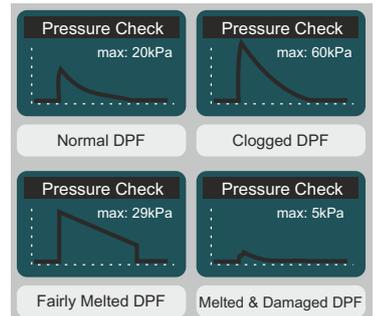

### THREE STAGE FULLY AUTOMATIC CLEANING

Soaking > Blowing > Cleaning - Able to set water injection time, air cleaning time and count

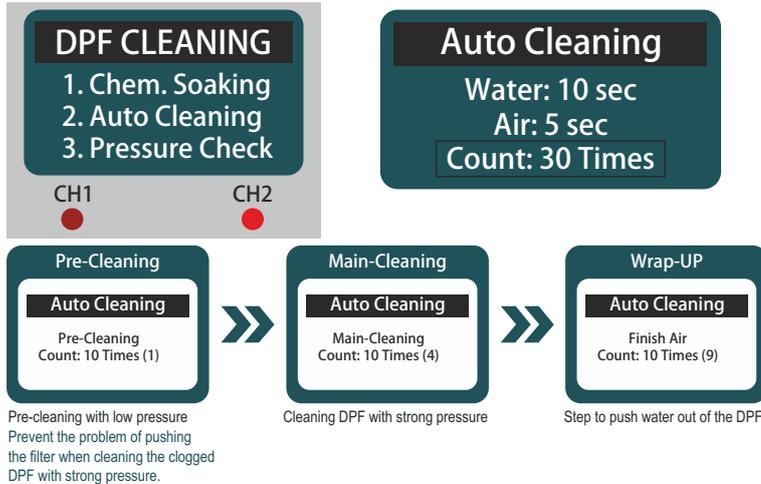

### ABLE TO CLEAN LARGE DPF



### DPF CLEANING BEFORE / AFTER





## SMCL-55/ SMCL-75/ SMCL-85

### Heavy Duty Column Lift | sarv

for Trucks, Buses & OTRs

#### Unique Features :

- 4-column, 6-column
- Remote control handset with 10 metres cable
- LCD screen shows the exact lifting height and fault diagnosis, etc
- Adjustable wheel support for all kinds of wheel sizes
- Each column is equipped with it's own control system, applies to four, or six, or eight columns per set.
- The hydraulic electric system provides safe and accurate real time control.
- With up-to-date technology, SCM control system ensures the lifts' synchronization.
- Double safety system: mechanical lock and hydraulic check valve.
- Fixed wheel supports or optional adjustable ones at your choice.
- Mobile and flexible, the system can be used indoor or outdoor.
- Waterproof design for use in commercial wash bays.

Technical Data	
Lifting capacity	5500/7500/8500 kgs per column
Motor power	1.1 KW
Max. lifting height	1700mm
Time for lifting or lowering	120s/100s
Power supply	400V/ 415V, 50Hz
Motor power	2.2 KW per column
Weight	580kgs per column
Lifting system	Hydraulic
Dimensions	226cm (H)*110cm (W)*120cm (L with Hydraulic trolley)

**Wireless Option Also Available\***

## HRJS-12

### High Rise Jack Stand | sarv

for Trucks & Buses

#### Unique Features :

- Used to support raised heavy duty vehicles, to facilitate maintenance and inspection procedures.
- The support stand is designed to be used in sets of 4, 6 or 8 and must be placed under a level, raised vehicle, at the support points designated by the vehicle manufacturer.
- Jack Stand features a double locking pawl and tooth design for extra protection.
- The one piece multi position ductile ratchet bar provides super strength and durability.
- The quick adjustment mechanism securely locks it into the desired location hence providing superior safety.



Technical Data	
Capacity	12 Ton
Minimum height	1295mm
Maximum height	1905mm
Base diameter	711mm
Weight	78kg

## 4P04LT12T/ 4P04LT16T

### Heavy Duty Four Post Lift

### Electro-Hydraulic with Runway | sarv

for Trucks & Buses

#### Unique Features :

- Flat runway design, optional rear side slips and jacking beams for wheel alignment using safety locks, manual release
- Strong hydraulic cylinder, heavy duty steel carriage
- Option available for Pneumatic also




Technical Data		
Models	4P04LT12T	4P05LT16T
Lifting capacity	12T	16T
Track length	7620mm	8386mm
Lift height	1700mm	1700mm
Track width	650mm	700mm
Motor power	3kw	3kw
Power supply	415v	415v

# ENGINE & GEAR BOX LIFTING CRANE

## SUJC-2T

Heavy Duty Mobile Hydraulic Engine & Gear Box Lifting Crane |  for Trucks & Buses

-  **CAPACITY:**  
2 Ton
-  **OVERALL HEIGHT:**  
2700mm
-  **AVAILABLE MODES:**  
Hydraulic with manual lock
-  **EASY LIFTING:**  
Hydraulic operation provides easy lifting to desired height.
-  **NEW DESIGN:**  
Designed for shops with limited space and for maximum portability.
-  **HEAVY DUTY:**  
Heavy Duty engine crane with reinforced leg assemblies for added strength and durability.
-  **WEIGHT:**  
500 kgs

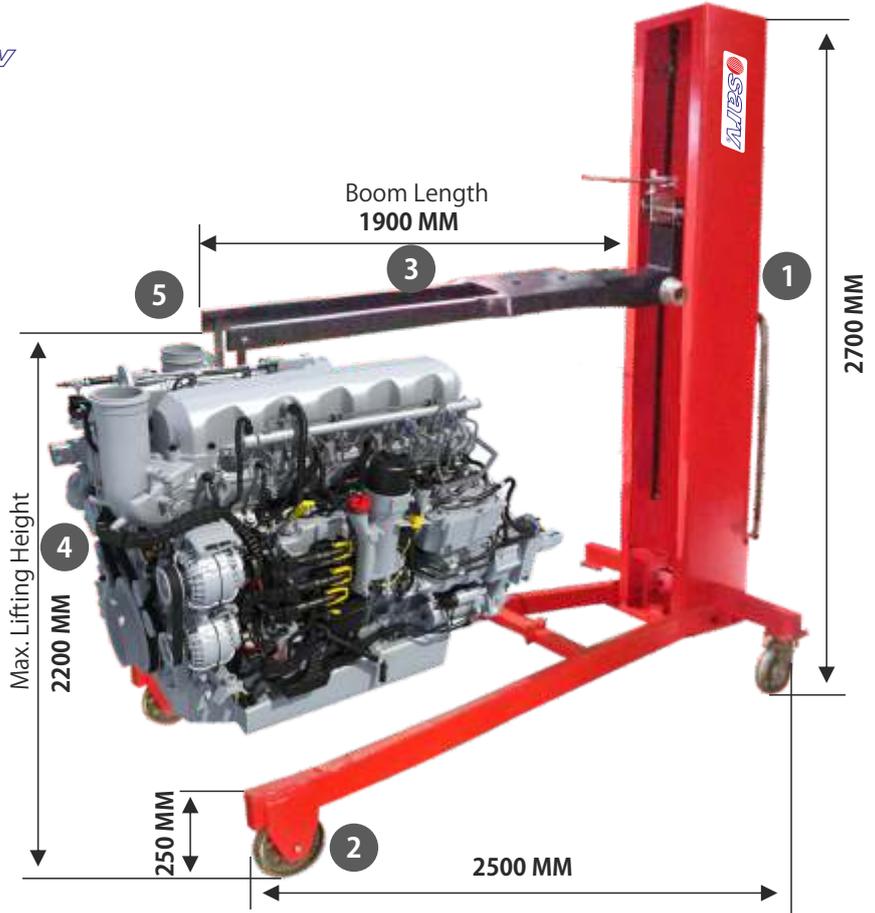

- USE**
- Heavy Duty Hydraulic Engine Lifting Crane Designed and Manufactured by SARV easily mantles & dismantles heavy weight Diesel Engines and gearbox from small and crowded Truck and Buses engine compartments and front show vehicles.
  - Extremely easy to operate because of Hydraulic lifting reducing the overall breakdown and overhauling engine time. Spray painted for rust free application.
  - Essential for your vehicle repair shops as it is capable of lifting the engine and gearbox together at once.

- 1** Single Pump Hydraulic operation makes the lifting mechanism extremely easy for the operator.
- 2** Comes with 4 Castor wheels with locking mechanism for hassle free parking.
- 3** Two Boom design gives extra strength to the crane's lifting capacity. Boom Length can adjustable.
- 4** 900 from the floor lifting of the engine & gear box directly on the boom without any tilts eliminates any possibilities of slippage.
- 5** Chain locking system for supporting engine and gear box.

## SCR-202T, 203T

JIB Crane |  for Trucks & Buses



Note: Foldable Model. Easy For Storage

Technical Data		
Models	SCR-202T	SCR-203T
Capacity	2.0 Ton	3.0 Ton
Lifting height (mm)	0-2100	0-2100
N.W.	27+53/28+55	44+71+15

# HEAVY DUTY UNIVERSAL HYDRAULIC TROLLEY

## ST-HTJ01.5

Universal Trolley for lifting ATS gearbox with retarder & crown  
for Commercial vehicle



- 1 The trolley is easily portable by single operator because of 360 degree swivel steel casters. Provided with a towing handle for easy carriage.
- 2 Easily Adjustable head plate with four adjustable quick-ratcheting brackets. Support plate can be tilted forward, backward, side to side, and extended or contracted for optimum alignment of bolt pattern and pins of all three equipment.
- 3 Mechanically lifted with help of safety bar. Precision Valve holds the trolley in position.
- 4 Mechanical locking ensures safety of gear box in case of any hydraulic failure.



### TECHNICAL SPECIFICATION



CAPACITY:  
1.5 Ton



CASTORS: Four castors for extra manoeuvrability.



PLATFORM LENGTH (PL) & WIDTH (PW):  
Min. 710mm, Max. 1045mm | Max. 410mm



WIDTH & LENGTH:  
W-810mm | L-1580mm



ALSO SUITABLE :  
For BS-IV and BS-VI Engines



LIFTING HEIGHT (H):  
Min. 200mm | Max. 800mm



WEIGHT:  
140kg



SAFETY CHAIN: Safety chain secures gear box in place during removal and transport

Sarv's Universal Trolley is Innovative and advanced hydraulic 3 in 1 trolley for removal and installation of Gear Box with retarder, ATS and Crown for Commercial Vehicles with ease.

Operators can save time, cost and space by eliminating the need to keep three separate trolleys.

Manufactured with high quality MS steel, is robust, stable and extremely sturdy for long time and continues workshop use. The trolley frame is built in 8mm Steel body which provides extra stability. It is powder coated for anti rust finish.

# HYDRO PNEUMATIC JACK



## STLS50-2J | STLS30-2

Hydro Pneumatic Trolley Jack | **sarv**

for Trucks & Buses



### UNIQUE FEATURES :

- Slow down valve
- Imported sealing from USA
- Hard chrome plated both internal & external cylinder
- Safety overload valve
- Self-return switch for safe working
- XTP industry sealing (double sealing function)
- Oil anti-back system

### STLS50-2J

### STLS30-2



	Capacity	Net Weight	Packing Size	Working Air Pressure	Min. Height	Max. Height	Lifting Height	Extension Height
STLS50-2J	50 Ton/25 Ton	67kgs	84x29x29mm	0.9~1.2mpa	215mm	564mm	50T - 115mm 25T - 114mm	75mm + 45mm
STLS30-2	30 Ton/15 Ton	32kgs	70x29x27mm	0.9~1.2mpa	150mm	413mm	30T - 74mm 15T - 69mm	75mm + 45mm



## TYRE VULCANIZING MACHINE

**Tyre and Tube vulcanizer** | **sarv**  
for Trucks & Buses

**Unique Features :**

- Used for passenger car, Truck Tire. Thermostatically controlled heat unit reaches operating temperature quickly for fast cure rates including tread.
  - Repair different areas of passenger tires
  - Three different size of plates for curing different sizes patch (upto5.5")
- Dual controllable heating system

DESIGN AND  
MANUFACTURED

**sarv**  
Professional Tyre Tools & Equipments Since 1991

Technical Data	
Vehicle	Cars, LCV's, HCV's
Tyre Size	22"
Max Repairing Size	6 1/2"x 4 1/2"
Operating Temp	135°C ~ 150°C
Supply voltage	AC: 220V ± 10% (50 Hz)
Current Rating	5 A
Throat Depth	30"
Throat Height	34"
Repair areas of the tyre	Sidewall Shoulder Crown/Tread
Dimensions (L X B X H)	730x510x1850
Weight	55 Kg

## SIC-5P

**Tyre Inflation Cage** | **sarv**  
for Trucks & Buses



**PROVIDE PROTECTION:** These safety cages, a mandatory precaution for tyre inflation, provide protection in cause of tyre bust.



**COLOUR:**  
Grey



**DIMENSIONS:**  
920L x 700B x 1365H mm



**WEIGHT:**  
130 kg



**MAX. TYRE SIZE:**  
12"-48" OD/304-1219 mm OD



**BARS:**  
Available in 5 bars



Used to safely inflate the tyres preventing injury to the operator in case of tyre burst.



**IN HOUSE  
MANUFACTURING**

## SAC7.5 / 10 / 15 / 20

**Heavy Duty Two Stage Air Compressor** | **sarv**  
for Trucks & Buses

**Unique Features :**

- The Heavy Duty Reciprocating type Air compressor with Electric Motor.
- SAC 7.5/10/15/20 is a Two Stage, Three Cylinder Driven with Star/Delta Starter and mounted on air tank.
- Horizontal Air Receiver with Moisture Separator.



Technical Data				
Models	SAC7.5	SAC10	SAC15	SAC20
No of cylinders	2	2	2	2
PD CFM	26.25	33.00	49.50	55
Working pressure	12.30Kg/cm <sup>2</sup>	12.30Kg/cm <sup>2</sup>	12.30Kg/cm <sup>2</sup>	25.00Kg/cm <sup>2</sup>
Power	7.5 Hp	10 Hp	15 Hp	20 Hp
Compressor RPM	600	800	900	900
Tank capacity	250 Litres	300 Litres	500 Litres	500 Litres

 IN HOUSE MANUFACTURING



It is used for adjusting scrub and thrust angle while performing wheel alignment.

## STLWAAJ-01

Wheel Alignment Adjustment jack | 

for Trucks & Buses

Technical Data	
Size	500x385x700mm (LxWxH)
Color	Red & Black
Opening Length Maximum	565mm
Closing Length Minimum	270mm
Distance from Ground	700mm (Maximum)

### Scope of supply:

Sr. No	Description	Size	Qty.
1	Extensions	2", 3" and 4"	1 Nos each
2	Hydraulic Hose PipeR2	1/4" BSP x length 800 mm.	1 Nos.
3	Hydraulic Double Nipple Male	1/4" BSP	2 Nos.
4	Wheel Nylon	3"	4 Nos.

## S550T

Wheel Dolly | 

### Unique Features :

- Perfect for 8-10 hole Budd tyre wheels.
- Budd Removes truck wheels and tyres fast and easy.
- Reduces manpower needs.
- Saves time and money, maintenance free.



**CAPACITY WEIGHT:**  
150 kg



**APPLY TO TYRE:**  
36" TO 48"



**NET WEIGHT:**  
8 kg



**GROSS WEIGHT:**  
10 kg



 IN HOUSE MANUFACTURING



## S650T

Wheel Dolly Hydraulic | 

### Unique Features :

- The hydraulic system on this heavy duty dual wheel dolly makes it easy to remove and install dual wheel assemblies from even the largest truck.
- Tilt Frame and Rolling Lift Arms for easy positioning of dual wheel assemblies.



**CAPACITY:**  
1 Ton



**MODEL:**  
Hydraulic



**NET WEIGHT:**  
61.50 kg



**GROSS WEIGHT:**  
78 kg



## STLPWT01

### Pneumatic Impact Wrench Holding Trolley | sarv

for Trucks & Buses

It is used for holding 1" & ¾" Impact Wrench which is approximately 12-15kg of weight for easily assembling & disassembling of wheel nuts of Passenger Car/Bus/Trucks without much effort.



**COLOUR:**  
Grey



**BOTTOM PLATE:**  
Dia 550 mm



**IMPACT WRENCH:**  
1" and ¾"



**HOLDING WEIGHT:**  
12 - 20 kg



**MEASUREMENT:**  
443 x 1250 x 500 mm

## STL-HLJ20T

### Hydraulic Long Floor Jack | sarv

for Trucks & Buses



Hydraulic Trolley Jack  
10ton/20ton

#### Unique Features :

- Large heavy duty rear swivel caster wheels provides easy maneuvering and positioning of jack.
- Welded base and cylinders to assure strength and eliminated leaks.
- Chromed pump piston and ram for added rust resistance.
- Foot pedal brings saddle up to load quickly.

#### Technical Data

Capacity	10/20Ton
Min. height	200mm
Max. height	590mm
Net weight	130Kgs
Length of chassis	1700mm
Saddle length	700mm
Handle length	1300mm

## STL-BJ-10/16T

### Bottle Type Hydraulic Jack | sarv

for Trucks & Buses

#### Unique Features :

- Long functional life.
- Superior Performance top of form
- High Quality
- Safe Ratcheting heads
- Makes Big loads easy to lift
- Good Finish & Rust Preventive Coating

#### Technical Data

Capacity	10 Ton	16 Ton
Minimum height	240mm	235mm
Maximum height	490mm	490mm
Weight	10.65kg	11.05kg
Base (Min)	150x150mm	150x150mm
Base thickness (Min)	20mm	25mm
Saddle dia (Min)	45mm	45mm
Saddle thickness (Min)	15mm	15mm
Tommy bar (Min)	39"	39"





## NITROPURE STL-G5-N<sub>2</sub>

### Nitrogen Tyre Inflation System | sarv

for Trucks & Buses

#### Unique Features :

- Generates nitrogen from compressed air
- Auto Shut-Off
- 2 Pre-Filters
- 118L/31.1gal (us) external nitrogen storage tank
- 1Nos\*10m/32.8ft standard hose with 2 quick couplers to connect the unit and your tire inflation gun
- Nitrogen purity test port
- Options available:
  - 118L/31.1gal(us) tank can be customised to 2pcs 14.5L/3.8gal(us) tanks
  - No need external tank for non painting

Technical Data		
Parameter/ Model	UoM	G5-N <sub>2</sub>
Nitrogen purity	%	95.5 - 99
Required input pressure	Kg/cm <sup>2</sup>	12-14
N <sub>2</sub> filling range	psi	0-174
Pre filter	Micron	5
Outlet Air pressure	Kg/cm <sup>2</sup>	10-12
Including external Nitrog. storage tank	Liters	118
Power supply	VAC	230/1 ph/50 ±/10v
Net weight	Kgs	98
Overall dimensions	mm	620x400x1275



## STL-ATI-W230

### Automatic Tyre Inflators | sarv

for Trucks & Buses

#### Unique Features :

- Aluminium die cast housing.
- Vandal resistant mechanical switches for long life.
- Ceramic sensor for highly accurate.
- Easy, clear and accurate suitable for indoor or outdoor.
- Can inflate accurately with hoses up to 50m.
- Comprehensive diagnostics and error reporting.
- Ideal for quick lube centers, rental car facilities and automobile dealership.
- Standard device includes chuck and rubber hose.

Technical Data	
Reader Unit	Digital Display, audible warning
Chuck Type	Clip on
Chuck Style	Single Straight
Scale	0.5-13bar 7-188psi 50-1300kpa 0.5-13kgf
Inset Size	1/4" Female BSP/NPT
Dimensions	31L*30W*22H cm
Weight	1PCS/6KGS
Accuracy	±0.02bar ±0.3psi ±2kpa ±0.02kgf
Operation	Auto Inflation, deflate
Supply Pressure Max	16bar 232psi 1600kpa 16kg/cm <sup>2</sup>
Supply Voltage	AC 110-240V/50-60HZ

**Inflation Safe-LED Type**  
Wall Mounted Tyre Inflator  
Available with Stand Also


## MES1000

### Metallic Separator | sarv

#### Unique Features :

Metallic Separator for Workshop Bays In Order To Prevent Heat Transfer Compatible for BS6 Workshop Bay.

Technical Data	
Weight	60kg
A	1500mm
B	1200mm
C	100mm

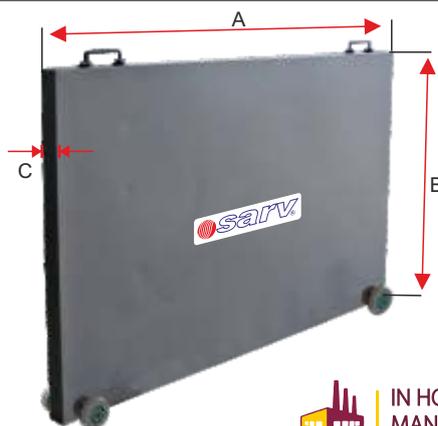

## ST-FB01

### Industrial Vertical Fan Blower | sarv

Technical Data	
Axis Fan	710 Dia
Power	1.44kw (2HP)
Fan Type	Vertical
Suitable for	Industry
Color	Blue



# SUPERMAN

## WHEEL CHANGE KIT



SCAN FOR DEMO VIDEO

### KIT CONTENTS



**Hydro Pneumatic Trolley Jack :**

for lifting the vehicle.



**Wheel Dolly :**

For easy movement of the wheel while removing and installing from/to the vehicle.



**Impact Wrench & Holding Trolley :**

for loosening/Tightening wheel nuts. Pneumatic Wrench trolley makes it easy to hold the pneumatic trolley.



**220603 Manual Tire Mount Demount Tool Kit :**

for Manually changing tubeless tires with even hard rusted beads within 2 minutes.!



**Tyre Bead Seater :**

Bead Seater for seating the bead for tyre inflation.



**Tyre Inflation Cage :**

A must for Tyre Workshops and Vehicle Garages for safely inflating the tyres and avoiding any accidents that may be caused due to tire explosion. It ensures a safer environment for the workers.



Easiest and the Safest way from SARV to Completely change the Truck /bus Wheels on your vehicle!! This is a complete Kit which helps you remove the wheel from your vehicle, Change the tire, Inflate it and install it back on the vehicle!!


### CHANGE YOUR WHEEL



Hydro Pneumatic Jack



Wheel Dolly



Impact Wrench Trolley



Smart Tool kit - 220603



Tyre Bead Seater



Tyre Inflation Cage



## RIV-15/16 GENX

### Riveting & Re-Riveting System | sarv

**Unique Features :**

- Easy and noise free operations.
- De-riveting done with ease without damage/ distortion to break shoe with speed.
- Riveting operation done with easy and speed.
- No damage/cracks to break shoe being fitted due to overload.
- Needs no infrastructure such as compressor/ pneumatic pipe line etc.
- Suitable for all sizes of rivets (All Metals) used
- for LCV to Trailers / Tractors.

Technical Data	
Motor	1 HP3 Phase 440V 50Hz
Optional	1 HP 1 Phase 240V
Oil	Hydraulic Enclø 68
Tank Capacity	15 Liters
Cylinder Stroke	300 mm

**Accessories**



## SMNL150

### Magnetic Nail Lifter Trolley | sarv

for Trucks & Buses

**Unique Features :**

- Used for quick Clearing of dangerous ferrous scrap metals which include iron chips, shavings, nails, nuts, screws, tacks, barbed wire and staples etc.
- Easy To Use Hand Held Trolley
- Wheels With Double Ball Bearing
- Discharge By Creating Gap Between
- Bottom Plate & Magnet
- Over All M/c Dimensions: 600 X 150mm
- Ferro Magnet Size: 400 X 100mm

Technical Data	
Magnet size(LxWxH)	18"X3"X11"
Total length	22" Inch
Total height	6" Inch
Handle total height from floor	34" Inch
Handle total height without floor	28" Inch

Magnetic Nail Lifter Trolley



## OM-300

### Electric Pre-Set Oil Control Gun | sarv

for Trucks & Buses

**Unique Features :**

- Heavy duty oil control gun with robust aluminium construction
- Electronic preset design; works on 4 x 1.5V AA batteries
- Dual Mode: Manual & Pre-Set (dispenses set quantity of media & stops)
- Oval gear mechanism for optimum accuracy
- Adjustable outlet nozzle can be positioned for in-line or 90° dispensing
- Resettable totalizer for individual batch can be set in litres, quarts, pints & gallons

Technical Data	
Flow rate	1 to 30 LPM
Inlet	1/2" BSP (F)
Accuracy	± 0.50%
Repeatability	± 0.20%
Max. working pressure	1,000 PSI (70 BAR)
Working temperature range	-5°C to 50°C
Minimum Pre. set qty.	0.10 Units
Maximum Pre. set qty.	99.9 Units
Max. resettable batch totalizer	999.9 Units
Max. non resettable batch totalizer	999999 Units
Viscosity of media dispensed	10 to 5000 cst
Resolution/least count	0.005 litre
Water resistance	IP55

## ST-GP15

### Portable Grease Pumps | sarv

for Trucks, Buses and Cars

#### Unique Features :

- These are ideal for use in industry, workshop, farm, construction or as part of the Mobile Grease System.
- Portable grease pump with build-in 15kg grease bucket.

15kg  
Bucket



## ST-GP30

### Portable Grease Pumps | sarv

for Trucks, Buses and Cars

#### Unique Features :

- World-class industrial high pressure grease pumps with guaranteed performance & hassle free operation.
- Designed to work in tough conditions.
- Portable grease pump with build-in 30kg grease bucket.

30kg  
Bucket



## V-12/16

### Bucket Oil Pumps | sarv

for Trucks & Buses

#### Unique Features :

- Portable oil pumps designed for dispensing transmission differentials & heavier oils.
- Pump with variable handle setting for use with media of different viscosities.
- Includes 48" / 4' PVC hose with nozzle
- Includes steel drum (12 litre or 16 litre capacity) with a choice of with or without wheels



## BGRP/50

### Air Operated Grease Ratio Pumps 50:1 | sarv

for Trucks & Buses

#### Unique Features :

- World-class industrial high pressure grease pumps with guaranteed performance & hassle free operation.
- Pump dispenses grease at pressure upto 50 times the air inlet pressure.
- Designed to work in tough conditions-
- These are ideal for use in industry, workshop, farm, construction or as part of the Mobile Grease System



## PGP-180

### Trolley Mounted Grease Pump Kit | sarv

for Trucks & Buses



#### Unique Features :

- Designed to cater to daily bulk greasing needs at workshops requiring movable systems Includes:
- Air operated 50:1 pump suitable for 180 kg drums.
- Steel drum cover.
- Rubber lined follower plate.
- 84" high pressure grease hose.
- Grease control valve.
- Drum trolley suitable for 180 kg grease drums.

## APG/HD/Z/1-4F/GM/B

### Metered Grease Control Valve | sarv

for Trucks & Buses



DGM/2/N  
Grease meter available  
as spare for in-line applications

Technical Data	
Control valve type	Continuous flow
Meter type	Digital oval gear
Grease flow	0.1 to 2.5 kg / minute
Max. working pressure	7,500 PSI (517 BAR)
Unit of measurement	kg /gms / lbs

#### Unique Features :

- Premium quality grease control valve, for use with air operated grease pumps
- Built-in high accuracy digital grease meter for dispensing exact amount of grease
- Ability to measure amount of grease dispensed prevents both over & under lubrication & is useful in saving bearing failures
- Provides continuous grease flow, with trigger fully pressed


## TD68 / TD90

### Heavy Duty Steel Truck Drains | sarv

for Trucks & Buses

#### Unique Features :

- Designed for use with heavy-duty trucks, buses, RV's and other low profile automobiles where a lift drain is not suitable.
- Rugged steel construction makes it ideal for use in heavy commercial vehicles repair shops.
- Baffles\* inside the reservoir prevents any oil spillage during transport.
- Available in two capacities  
a. 68 litres b. 90 litres
- Both sizes available with and without pump Manual  
Pump discharge upto 1 litre / 5 turns

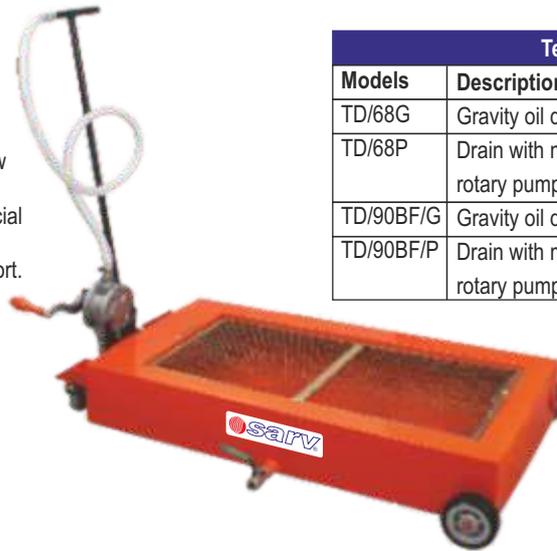

Technical Data			
Models	Description	LXWXH(mm)	Capacity
TD/68G	Gravity oil drain	1065x560x190mm	68
TD/68P	Drain with manual rotary pump	1065x560x190mm	68
TD/90BF/G	Gravity oil drain	1215x750x212mm	90
TD/90BF/P	Drain with manual rotary pump	1215x750x212mm	90

## STL-ODP5

### Oil Pump Kits | sarv

for Trucks & Buses

#### Unique Features :

- Manufactured from heavy gauge 4 mm thick steel sheet for increased strength & durability.
- 3" (75 mm) ground clearance for smooth movement over uneven surfaces in workshop environment.
- 6" (150 mm) wide polyurethane front wheels with nylon rim for reduced wear & tear.

Includes:

1. Ratio Pump Assembly.
2. Hose reel.
3. Trolley.
4. Oil control Gun.
5. Filter, Regulator Combination and Lubricator with Pressure Gauge.



Technical Data	STL-ODP3	STL-ODP5
Pump Ratio	3:1	5:1
Working Pressure	30-150 PSI	30-150 PSI
Max. Air Pressure	150 PSI	150 PSI
Flow Rate at Pump Outlet	Up to 14 LPM	Up to 18 LPM
Least Count of Oil Control Gun	0.001 units	0.001 units
Accuracy of Meter	±0.5%	±0.5%
Repeatability of Meter	0.30%	0.30%
Hose	3.5m Hydraulic Hose with 1/2" ID	10m Hose Reel with 1/2" ID
Thread Type	BSP	BSP
Air Consumption of Pump	230 LPM	250 LPM

## GREEN-DEF-40A

### DEF Dispensing System

#### Closed, Sealed & Secure | sarv

for Trucks & Buses

#### Unique Features :

DEF pump kit is designed for IBC tank, it's the best choice for filling and dispensing the DEF, the kit is Mounted with the tank, with automatic nozzle and K24 flow meter, you can dispense the DEF very easily.

Accessories :

1. 240V adblue pump
2. K24 meter
3. 3/4" automatic nozzle
4. Hose
5. IBC adaptor
6. Stainless basket

Technical Data	
Voltage	240V/50Hz
Power	370W
Speed	1450rpm
Flow Rate	0-30L/min
Inlet & outlet	25mm
Suction	1 m
Packing Size	40x40x30cm



AP 35 Adblue Pump	Meter (K24)	Def Automatic Shut off Nozzle (LB 325)	DEF EPDM Hose	Bracket
Flow : 35-45L/min self-priming : 3m voltage : 230V AC 50hz or 12/24V DC	Flow range : 10-120L/min Accuracy : 1% pressure : 1Mpa Connections: BSPF1" or NPT1"	Fittings : 3/4", 1", BSPF or NPT1" Flow range : 0-60L/min Max pressure: 5 bar	Dia : 19mm Material : EPDM Thickness : 4MM	With nozzle holder 2mm thickness SS304 material

## FITNESS TEST LANES

for Buses & Trucks

**Unique Features :**

- Capacity Axle 3Ton to 10Ton.
- Integrated Control Console.
- Integrated Software for total test report.



Brake Tester



Speedometer Tester



Play Detector



Side slip Tester



Head Light Tester



Control System

## STBC06N

Heavy duty Battery Charger | **sarv**  
for Cars

**Unique Features**

- Over Heat Protection.
- Over Load / Under Load Protection.
- Reverse Polarity Protection.
- Short Ckt. Protection.
- Ampere / Voltage Meters & Gauges
- Charging Cables Set With Suitable Connectors.



BENCH TYPE

Technical Data	
Max. Current	20 Amps
Output Voltage	12 – 72V (Up to 80V Adjustable)
Transformer	Air Cooled
Nos. of Batteries	Suitable For Charging 6 Batteries of 12V – 180AH At A Time
Input Main Supply	AC Single Phase 230 V

**SAFETIES :**



Reverse Polarity Protection.



Over Current Protection.



Electronic Fuse (Resettable).

## STL-ACM-SEMI

A/C Refrigerant Work Station | **sarv**  
for Cars & LCV's

**Unique Features**

- LCD Monochrome Display.
- Filter in recovery line to eliminate humidity & acidity.
- Manual air purge from refrigerant tank.
- Auto calibration mode.
- shock proof protection for load cells.

Technical Data	STL-ACM-SEMI
Operating Mode	Semi-Auto
Power Supply	220V±10% 50/60Hz
Cylinder Capacity	13.6Kg
Max. Refrigerant	10Kg
Recovery Rate	95%
Vapor Recovery Speed	300g/min
Liquid Recovery Speed	200g/min
Charge Speed	800g/min
Vacuum Speed	3600L/hour
Dry Filter	350ml
Load Cell Accuracy	±10g



## STL-IW-TS

1/2" Drive

SQ. Impact Wrench | 

for Cars & LCV's



Technical Data	
Air pressure	6-8kg/cm2
Air inlet	1/4"
Free speed	7500r.p.m
Square head	1/2"
Blow structure	Twin hammer structure
Max torsion	800N.m
Disassembling ability	18mm
Spindle length	1"
Net weight	2.6kg

## ST-5300

1/2" Drive

SQ. Impact Wrench | 

for Cars & LCV's



Technical Data	
Air pressure	6-8kg/cm2
Air inlet	1/4"
Free speed	8500r.p.m
Square head	1/2"
Blow structure	Twin hammer structure
Max torsion	1200N.m
Disassembling ability	24mm
Spindle length	1"
Net weight	3.0kg

## TSW-840SL | TSW-842P

Pneumatic 1 inch Impact Wrenches | 

for Trucks & Buses

- Ergonomic design.
- Compact.
- Built-in power regulator.
- Single forward and reverse button.
- Positive action trigger.



TSW-840SL



TSW-842P

Technical Data	TSW-840SL	TSW-842P
Max torque	2300 nm	2500 nm
working torque	830-2000 nm	1000-2200 nm
Capacity	M40 bolt size	M41 bolt size
Free speed	4400 rpm	4700 rpm
Weight	12.1 kg	10.9 kg
Hammer mechanism	Pin hammer	Pin hammer
Air consumption	0.75 m3/min	0.75 m3/min
Air consumption	26.5 c.f.m	26.5 c.f.m

## ST-5068

1" Drive

SQ. Impact Wrench | 

for Trucks & Buses



Technical Data	
Air pressure	8-10kg/cm2
Air inlet	1/4"
Free speed	3500r.p.m
Square head	1"
Blow structure	A single hammer without pin
Max torsion	3500N.m
Disassembling ability	46mm
Spindle length	8"
Net weight	16.8kg

## ST-699B

1" Drive

SQ. Impact Wrench | 

for Trucks & Buses



Technical Data	
Air pressure	6-8kg/cm2
Air inlet	1/2"
Free speed	6000r.p.m
Square head	1"
Blow structure	Twin hammer structure
Max torsion	2200N.m
Disassembling ability	32mm
Spindle length	1"
Net weight	7.3kg



1 220603 SMART TOOL KIT

1 Tubeless Tyre Mount/Demount Smart Tool Kit for 22.5" Tubeless Tyre

Weight: 29.385kg  
Code No. 220603

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
• Bag with Wheels (optional)	1 No.	4.600kg	220412
• Mounting Lever	1 No.	2.950kg	220514
• Demounting Lever	1 No.	10.100kg	220614
• Impact Bead Breaker	1 No.	10.500kg	220134
• Bead Holding Tool	1 No.	770gms	220500
• Valve Core Screw Driver	1 No.	25gms	330002
• Sarv Paste (Economy)	1 No.	1.000kg	2200130
• Brush for Truck Tyre	1 No.	150gms	220415
• Duster	1 No.	15gms	D0015

Use : Mounts all type of tubeless tyres 20" to 24.5". Demounts tyre in 8 seconds and remounts in 20 seconds.



2 220905 TUBELESS TYRE MOUNT DEMOUNT TOOL KIT FOR 17.5" TYRES

2 Tubeless Tyre Mount/Demount Tool Kit for 17.5" Tyre

Weight: 21.600kg  
Code No. 220905

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
• Mounting Lever	1 No.	2.200kg	221514
• Demounting Lever	1 No.	6.500kg	221414
• Impact Bead Breaker	1 No.	10.500kg	220134
• Bead Holding Tool	1 No.	250gms	220513
• Valve Core Screw Driver	1 No.	25gms	330002
• Sarv Paste (Economy)	1 No.	1.000kg	2200130
• Brush for Truck Tyre	1 No.	150gms	220415
• Duster	1 No.	15gms	D0015

Use : Specifically designed to mount/demount 17.5" tyres without damaging the tyre bead and rim.



3 220303 RING REMOVAL/FITTING TOOL KIT


3 Rim Lock Ring Fitting/ Removal Tool Kit (For TubeType Tyres)

Weight: 18.215kg  
Code No. 220303

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
• Ring Removal Tool	1 No.	3.500kg	220914
• Ring Fitting Tool	2 No.	2.950kg	221014
• Tyre Lever 600mm	2 No.	930gms	220008
• Tyre Lever with Crank End	1 No.	1.360kg	220003
• Valve Core Screw Driver	1 No.	25gms	330002



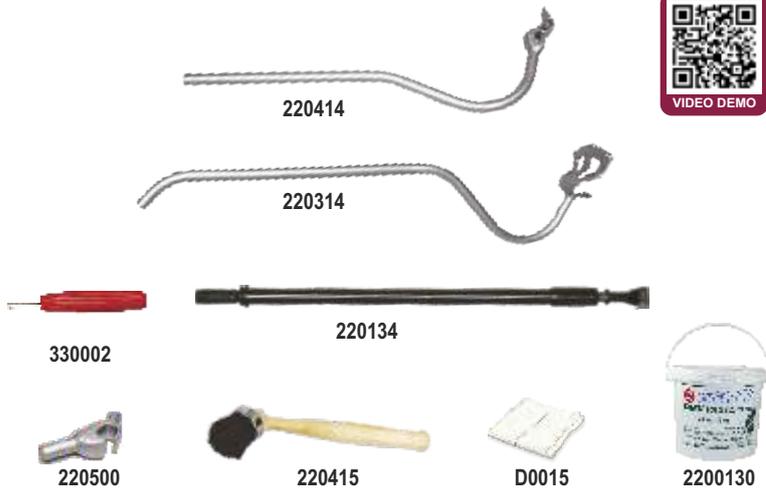

**4 220503 REGULAR TOOL KIT**

**IN HOUSE MANUFACTURING**



**5 220403 STANDARD TOOL KIT**

**IN HOUSE MANUFACTURING**



**6 2206953 TUBELESS TYRE MOUNT DEMOUNT COMBO TOOL KIT**

**4 Tubeless Tyre Mount/ Demount Regular Tool Kit**

**Weight:** 21.435kg  
**Code No.** 220503

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
Mounting lever	1 No.	2.600kg	220414
Demounting Lever	1 No.	6.500kg	220314
Impact Bead Breaker	1 No.	10.500kg	220134
Bead Holding Tool	1 No.	770gms	220500
Valve Core Screw Driver	1 No.	25gms	330002
Sarv Paste (Economy)	1 No.	1.000kg	2200130
Brush for Truck Tyre	1 No.	150gms	220415
Duster	1 No.	15gms	D0015

**Use :** Mounts all type of tubeless tyres 20" to 24.5". Demounts tyre in 8 seconds and remounts in 20 seconds. Works on standard and super single duplex tyres.



**5 Tubeless Tyre Mount/ Demount Standard Tool Kit**

**Weight:** 22.170kg  
**Code No.** 220403

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
Bag with Wheels (optional)	1 No.	4.600kg	220412
Tyre Lever	2 No.	1.950kg	220004
Tyre Lever	1 No.	1.630kg	220184
Impact Bead Breaker	1 No.	10.500kg	220134
Bead Holding Tool	1 No.	350gms	220400
Valve Core Screw Driver	1 No.	25gms	330002
Sarv Paste (Economy)	1 No.	1.000kg	2200130
Brush for Truck Tyre	1 No.	150gms	220415
Duster	1 No.	15gms	D0015

**Use :** Mounts / Demounts all types of tubeless tyres 17.5" to 24.5".



**6 Tubeless Tyre Mount Demount Combo Tool Kit**

**Weight:** 40.410kg  
**Code No.** 2206953

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
Bag with Wheels (optional)	1 No.	4.600kg	220412
Mounting Lever	1 No.	2.950kg	220514
Demounting Lever	1 No.	10.100kg	220614
Mounting Lever	1 No.	2.200kg	221514
Demounting Lever	1 No.	6.500kg	221414
Bead Holding Tool	1 No.	250gms	220513
Sarv Paste (Economy)	1 No.	1.000kg	2200130
Brush for Truck Tyre	1 No.	150gms	220415
Duster	1 No.	15gms	D0015
Ring Removal Tool	1 No.	3.500kg	220914
Ring Fitting Tool	2 No.	2.950kg	221014
Tyre Lever 600mm	2 No.	930gms	220008
Tyre Lever with Crank End	1 No.	1.360kg	220003
Valve Core Screw Driver	1 No.	25gms	330002

**Use :** Tubeless tyres 22.5", 17.5" and Tube type tyres.





**7** 220804 COMBI OTR TYRE BEAD BREAKER KIT


**7** COMBI OTR Tyre Bead Breaker Kit

**Weight:** 30.500 Kg  
**Code No.** 220804

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
• Combi Bead Breaker	1 No.	–	220804A
• Air Hydraulic Pump (10,000 psi)	1 No.	–	220804B
• 8' Hydraulic Hose	1 No.	--	220804C

**Use** : Works on single, 2 and 3 piece 25" wheels. The tool clamps hydraulically to the wheels and then breaks bead with 11 tons of force. 3.75" (9.5cm) stroke length. Used with 10,000 psi (700bar) air/hydraulic pump.

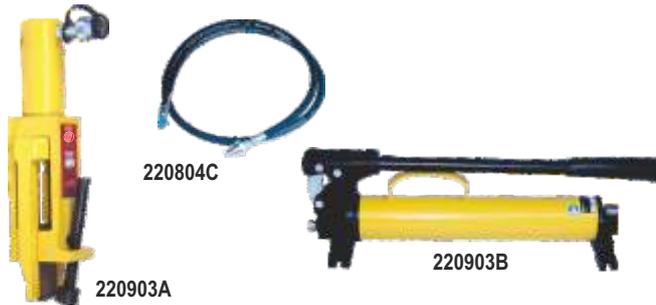

**8** 220903 GIANT OTR BEAD BREAKER KIT

**8** Giant OTR Bead Breaker Kit

**Weight:** 21.500 Kg  
**Code No.** 220903

The Kit contains the following items:

Tool:	Qty:	Weight:	Code No.
• OTR Giant Tire Bead Breaker	1 No.	–	220903A
• Hydraulic Hand Pump (10,000 psi)	1 No.	–	220903B
• 8' Hydraulic Hose	1 No.	--	220804C

**Use** : Most popular tool for breaking beads on earthmover tires, sizes 25"-51". Works on 5 piece wheels with bead loosening pockets. 4 1/4" (10.8 cm) stroke ram.



**1** 220415

**2** 221115

**1** Special Brush for Tyres with Wooden Handle for Trucks & Earthmovers

**Size (Handle):** 300mm long  
**Dia.** 50mm  
**Weight:** 150gms  
**Code No.** 220415

**Use** : Used to lubricate tire beads when mounting or removing tyres.



**2** Special Brush for Tyres with Wooden Handle

**Size (Handle):** 340mm long  
**Dia:** 50mm  
**Weight:** 68gms  
**Code No.** 221115

**Use** : Used to lubricate tire beads when mounting or removing tyres.



**3** 2200120



**3** 2200420

**3** Sarv Paste (White)

**Colour:** Yellow  
**Weight:** 1kg  
4kg  
**Code No.** 2200120  
2200420

**Use** : Quick drying, non greasy tyre paste. Used for lubricating tyre beads in mounting & demounting operations.



**4** 2200130



**4** 2200430



**4** 2200530

**4** Sarv Paste (Economy)

**Colour:** White  
White  
White  
**Weight:** 1kg  
4kg  
5kg  
**Code No.** 2200130  
2200430  
2200530

**Use** : Quick drying, non greasy tyre paste. Used for lubricating tyre beads in mounting & demounting operations.



**5** 2200440



**5** Tyre Grease (From Michelin, France)

**Colour:** Brown  
**Weight:** 4kg  
**Code No.** 2200440

**Use** : Quick drying, non greasy tyre paste. Used for lubricating tyre beads in mounting & demounting operations.

**IN HOUSE  
MANUFACTURING**



**1** 2200117



**2** 2200217



**2** 2200517



**3** 2200317



**4** 2200417



**5** 2200137



**6** 550005



**7** 550005BL

**1 Tyre Tread Depth Gauge (Plastic)**

**Size:**  
0 - 30mm

**Weight:**  
30gms

**Code No.**  
2200117

**2 Tyre Tread Depth Gauge (Stainless Steel)**

**Size:**  
For Passenger Car tyre 0 - 50mm  
For Truck tyre 0 - 90mm

**Weight:**  
30gms  
85gms

**Code No.**  
2200217  
2200517

**3 OTR Tread Depth Gauge (Aluminum)**

**Size:**  
0 -150mm /  
0-192 (32 NDS)

**Weight:**  
170gms

**Code No.**  
2200317

**Use :** For measurement of Earthmover tyre tread depth. Supplied with case. Easy readability due to Glass lens.

**4 OTR Tread Depth Gauge (Acrylic Plastic)**

**Size:**  
0-160mm /  
0-192 (32 NDS)

**Weight:**  
55gms

**Code No.**  
2200417

**Use :** For measurement of Earthmover tyre tread depth. Supplied with case.



**5 Digital Depth Gauge**

**Size:**  
0 - 50mm

**Weight:**  
35gms

**Code No.**  
2200137

**Use :** Calibrated in mm. Good for Passenger Car tyre. Used for measuring tread depth.

**6 Tool to Cancel Tyre Tread**

**Weight:**  
110gms

**Code No.**  
550005

**Material :** Blades are made from Special Steel.

**Use :** Used for cleaning the tyre by cancelling the extra tyre treads.



**7 Blade for Tool to Cancel Tyre Tread**

**Size:**  
0 - 50mm

**Weight:**  
2gms

**Code No.**  
550005BL

**Use :** Used as an accessory for 550005.


 IN HOUSE  
MANUFACTURING



8 224222



8 224222R



9 224217



9 224224



10 665400 Manual Wrench Set



11 220313 Tyre Bead Seater/Blaster

8 Pump Ring Rigid for Tubeless Truck Tyre

**Size:** 22.5" **Weight:** 11.000kg **Code No.** 224222

**Use :** Provides safe seating of tubeless tyres during inflation. Specifically useful for deformed or bent rims where air escapes during inflation. Forms a seal around the rim and automatically comes out upon complete inflation.

Rubber Ring for Pump Ring Rigid

**Weight:** 3.500kg **Code No.** 224222R

**Use :** Used inside rigid pump ring. Provides an anti slippery firm seating of the pump ring on the rim.



9 Pump Ring Flexible for LCV and HCV Tubeless Tyre

**Sectional Dia:** 25mm **Size:** 17.5" **Weight:** 750gms **Code No.** 224217  
25mm **Size:** 22.5" to 24.5" **Weight:** 1.000kg **Code No.** 224224

**Use :** Used for sealing the tyre beads of the rims.



10 Manual Wheel Nut Opening Wrench Set

**Sockets:** 27, 32 mm **Size:** 1" **Sockets:** 27, 32 mm **Code No.** 665400

**Material :** Alloy.

**Use :** Opens Truck / Bus Nuts with ease. Portable and safe to use. Rests between two nuts for leverage.



11 Tyre Bead Seater/Blaster

**Code No.** 220313

**Use :** Seats beads on all tyres upto 24.5" truck tyres. Includes easy carry handle for portability. Included mounting feet makes storing the unit easy and helps protect the barrel assembly from damage Operates on standard shop air: Max 120 PSI



 IN HOUSE  
MANUFACTURING

**BEST  
SELLER**



12 224430



12 224432



12 224433



12 224436



12 224438



12 224440



13 224232



13 224233



13 224332



13 224333

**12 WHEEL PROTECT<sup>®</sup> Loose Wheel Nut Indicator**

Size:	Code No.	Size:	Weight:	Code No.
17mm	224417	30mm	2gms	224430
19mm	224419	32mm	2gms	224432
21mm	224421	33mm	2gms	224433
24mm	224424	36mm	2gms	224436
26mm	224426	38mm	2gms	224438
27mm	224427	40mm	2gms	224440
		41mm	2gms	224441

**Material :** Special Durable Plastic.

**Colour :** Fluorescent Yellow, Red, Pink, Green, Orange.

**Note :** Customized colour can be provided for large orders.

**Before:** Loose wheel nut indicators securely set over wheel nuts pointing towards each other. Tyre is safe for travel.



**After:** Link broken due to loose nuts. Change in direction indicate the loosening of nut. Loose Nuts need to be tightened before tyre can be made safe for travelling.

**13 Dust Cap & Loose Wheel Nut Indicator**

Type:	Size:	Weight:	Code No.
Upper arrow	32mm	17gms	224232
Upper arrow	33mm	17gms	224233
Bottom arrow	32mm	17gms	224332
Bottom arrow	33mm	17gms	224333

**Material :** Special Durable Plastic.

**Colour :** Green, Red, Yellow, Pink.

**Note :** Customized colour can be provided for large orders.

**Before:** Loose wheel nut indicators securely set over wheel nuts pointing towards each other. Tyre is safe for travel.



**After:** Link broken due to loose nuts. Change in direction indicate the loosening of nut. Loose Nuts need to be tightened before tyre can be made safe for travelling.

 IN HOUSE  
MANUFACTURING



**1** Valve Core Screw Driver standard single ended 1" stem length

**Colour:** Red **Weight:** 25gms **Code No.** 330002

**Material:** Carbon Steel and Plastic handle.  
**Use:** Removing & fixing valve cores.

**2** Valve Core Screw Driver standard single ended 1" stem length

**Colour:** Red **Weight:** 20gms **Code No.** 3300014

**Material:** Carbon Steel and Plastic handle.  
**Use:** Removing & fixing valve core VG5.

**3** Valve Core Screw Driver 2" Stem Length with Torque

**Weight:** 40gms **Code No.** 3300414

**Torque:** Pre-set tightening torque 0.4 Nm.

**Material:** Carbon Steel & Plastic handle. Metal part is Nickel Chrome Plated.  
**Use:** Prevents over screwing of the core while removing & fixing.

**4** Valve Core Screw Driver double ended 1" stem length (VG5/VG8)

**Colour:** Red **Weight:** 35gms **Code No.** 3300012

**Material:** Carbon Steel and Plastic handle.

**Use:** Removing & fixing valve cores, VG5 from one end and VG8 from the other end.

**5** Valve Core Screw Driver for Truck/Bus Tyres

**Weight:** 100gms **Code No.** 3300111

**Use:** For removal and fixing of truck/bus tyre valve core and caps from each side respectively.

**6** Valve Cap Screw Driver For OTR Tyres

**Weight:** 120gms **Code No.** 3300641

**Material:** Special Steel.

**7** Ventifix Plastic

**Colour:** Green **Weight:** 75gms **Code No.** 330003  
Blue **Weight:** 75gms **Code No.** 330003BLU

**Material:** Polyamide-6 for imparting super bending strength to the lever.

**Finish:** All metal parts are Nickel Chrome Plated.

**Use:** For mounting Rubber snap-in valves on Passenger Car. Protects light metal alloy rims from scratch.

**8** Flexible Valve Extensions

**Size** **Code No.**  
85mm 550006  
Available in 3 sizes 115mm  
125mm

**Use:** Used as flexible valve extension for extension for inflating the tyres.



**9** Flexible Valve Extensions for OTR Tyre Valves

**Code No.** 551117

**Use:** Used as flexible valve extension for OTR tyre valves.

PRESSURE GAUGE

**BEST SELLER**



1 554008 | **W** WUNDER



2 556008

**BEST SELLER**



3 551008 | **S** SCHRADER

**BEST SELLER**



4 551208 | **S** SCHRADER

INFLATOR GAUGE

**BEST SELLER**



5 559008 | **S** SCHRADER



6 551408



7 551508



8 551508DF



Pressure Gauge with Deflator

9 557008

**1 Truck Tyre Pressure Gauge (EURODAIRA) With Dual Foot Chuck for Standard Bore Valves (From Wonder Italy)**

**Range:** (0.7-12) Bar (10-170)psi **Weight:** 286gms **Code No.** 554008

**Use :** For Passenger Car, Motorcycle and Scooter.

**2 Pressure Gauge for checking the pressure**

**Range:** (220psi / 15kg / 1500kpa) **Weight:** 286gms **Code No.** 556008

**3 Tyre Pressure Gauge (EURODIARA) (From Schrader, France)**

**Range:** Dual calibrated: (0.7-12) Bar and (10-170) psi. **Weight:** 170gms **Code No.** 551008

**Note :** 1.5 metre hose length.

**4 Tyre Pressure Gauge (EURODIARA) (From Schrader, France)**

**Range:** Dual calibrated: (0.7-12) Bar and (10-170) psi. **Weight:** 350gms **Code No.** 5508

**Use :** Use with small and big bores. Has two adjustable valve openings.

**5 Dial type Tyre Inflator Gauge (EURODIANU) (From Schrader, France)**

**Range:** Dual calibrated: (0.7-11) Bar and (10-160) psi. **Weight:** 680gms **Code No.** 559008

**Note :** 1.5 metre hose length. Protective rubber covers around the gauge body.

**6 Tyre Inflator Gauge (from Mastair)**

**Range:** Dual calibrated: (0.7-12) Bar and (10-170) psi. **Weight:** 650gms **Code No.** 551408

**7 Digital Tyre Inflator**

**Range:** Dual calibrated: (0.7-12) Bar and (10-170) psi. **Weight:** 750gms **Code No.** 551508

**8 Digital Tyre Inflator, Dual Foot**

**Range:** Dual calibrated: (0.34-12) Bar and (5-170) psi. **Weight:** 645gms **Code No.** 551508DF

**Note :** Hose length 450mm.

**9 Pressure Gauge with Deflator for checking Tyre pressure & Deflation**

**Range:** (220psi / 15kg / 1500kpa) **Weight:** 239gms **Code No.** 557008

INFLATOR GAUGE



10 555008

<b>10 Inflator Gauge</b>			
<b>Range:</b>	(0.7-12) Bar(10-174)psi	<b>Weight:</b>	350gms
		<b>Code No.</b>	555008

<b>11 Air Inflation Nozzle</b>			
<b>Size:</b>	Air nipple 6 mm	<b>Weight:</b>	30gms
		<b>Code No.</b>	550011

**Use** : Used in Passenger cars and trucks during inflation. Is connected to the valve.



11 550011

TYRE REPAIR TOOLS & KITS

 IN HOUSE MANUFACTURING



1 443831



2 443861



3 440004




4 440005



5 4400041



6 4400021

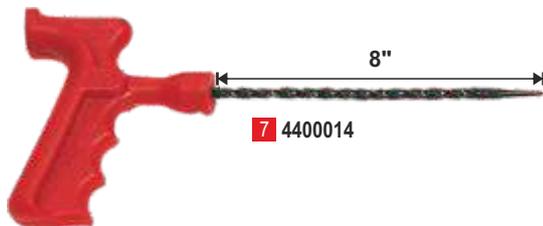

7 4400014

<b>1 Sticher Serrated Wooden Handle</b>			
<b>Thickness:</b>	3mm	<b>Dia:</b>	38mm
		<b>Weight:</b>	135gms
		<b>Code No.</b>	443831

<b>2 Sticher Serrated Wooden Handle</b>			
<b>Thickness:</b>	6mm	<b>Dia:</b>	38mm
		<b>Weight:</b>	160gms
		<b>Code No.</b>	443861

<b>3 Flexible Skiving Knife</b>			
		<b>Weight:</b>	50gms
		<b>Code No.</b>	440004

<b>4 Hoe Style Inner Liner Scraper</b>			
<b>Colour:</b>	Blue	<b>Weight:</b>	120gms
		<b>Code No.</b>	440005

**Use** : For cleaning the inner liners for both puncture and section repair prior to buffing.



<b>5 Tyre Injury Measuring Tool</b>			
		<b>Weight:</b>	95gms
		<b>Code No.</b>	4400041


**Use** : A special tool used for measuring tyre injury varying from 3mm to 15mm.

<b>6 Tyre Probe</b>			
<b>Handle:</b>	Wooden	<b>Size:</b>	100mm long
		<b>Weight:</b>	110gms
		<b>Code No.</b>	4400021

**Use** : For verifying damages, course of injuries and removing small foreign objects from the tyre tread.

<b>7 Truck Rasp in Pistol Grip Handle</b>			
<b>Colour:</b>	Red	<b>Size:</b>	8"
		<b>Weight:</b>	100gms
		<b>Code No.</b>	4400014

**IN HOUSE MANUFACTURING**

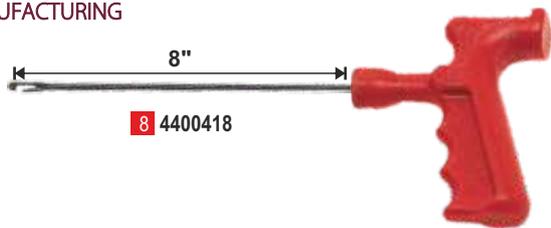

8 4400418



9 4400017



9 4400917



9 4400617



9 4401917



9 4401617



9 4401017



9 4400817



9 4401317



9 4401817



10 660005 High Speed Buffer Kit

**8 Side Split Needle in Pistol Grip Handle**

**Colour:** Red  
**Size:** 8"  
**Weight:** 110gms  
**Code No.** 4400418



**9 Angular Milling Cutter (High Speed Steel)**

Blade Length :	Total Length:	Dia:	Weight:	Code No.
30mm	90mm	6mm	16gms	4400017
45mm	80mm	6mm	18gms	4400617
45mm	75mm	6mm	16gms	4401617
50mm	110mm	8mm	40gms	4400817
60mm	110mm	8mm	40gms	4401817
40mm	110mm	9mm	45gms	4400917
50mm	110mm	9mm	45gms	4401917
64mm	115mm	10mm	55gms	4401017
72mm	120mm	13mm	95gms	4401317

**Use** : For the precise injury preparation on radial and cross-ply tyres.

**10 High Speed Buffer / Skiver Kit**

**Weight:** 1.200kg  
**Code No.** 660005

The Kit contains the following items:

Tool:	Qty:
Air die grinder	1 No.
• 1/4"/6mm Mounted grinding stones	5 No.
• 1/8"/3mm Mounted grinding stones	5 No.
• Hand Wrenches	2 No.
• Air Nipple	1 No.
• 3mm 1/8" collet	1 No.
• Blow mold case	1 No.




220302



SC703



440327



4400617



4401817



440227



443861



440627



4400041



YCH01



CP1



440005BK



44CK07

11 440097 SARV HCV SEAL KIT

**11 SARV HCV Seal KIT (Mushroom Type Tubeless Tyre Repair Kit)**

**Weight:** 2.350kg  
**Code No.** 440097

The Kit contains the following items:

Tool:	Qty:	Code No.
• Bag	1 No.	220302
• Sarv Vulcanising Fluid 250ml	1 No.	SC703
• Mushroom patch 6mm	5 No.	440227
• Mushroom patch 8mm	5 No.	440327
• Angular Milling Cutter 6mm	1 No.	4400617
• Angular Milling Cutter 8mm	1 No.	4401817
• Spherical Rasp	1 No.	440627
• Tyre Injury Measuring Tool	1 No.	4400041
• Special Sticher for Mushroom Kit	1 No.	443861
• Chalk for Marking	1 No.	YCH01
• Knife to cut the extra patches	1 No.	44CK07
• Combination Plier	1 No.	CP1
• Hoe Style Inner Liner Scrapper	1 No.	440005BK
• Wire Brush	1 No.	WB2
• Electric Drill Machine (13mm) (optional)	1 No.	85022-13



WB2



85022-13

## S250T

### Air Operated Truck Tyre Spreader (With Lying Base) | sarv

**Unique Features :**

- The air powered tyre spreader (with laying Base) is designed for fix, spread and lift when repairing truck tyres. The available operations include tyre inspection, cutting, buffing, dust suctioning, inserting tubes and patching.
- The wider platform offers a more stable work surface. The adjustable light increases visibility inside the tyre. All makes the repairing works quick and convenient.

Technical Data	
Voltage	220/110V 50/60V
Air pressure	8-12kgs/cm <sup>2</sup>
Apply to tyre	Max. 18R/22.5"
Net weight	127kgs
Gross weight	160kgs



## S450T

### Air Operated Truck Tyre Test Tank | sarv

**Unique Features :**

- Air operated truck tyre test tank (with lift).
- Efficient, safe and convenient testing of car, truck, tractor and EM tubeless tyre as well as inner tubes.
- The mobile lift which can lift pallets up to 600kg (with optional forks) can be detached from the test tank.
- With Built-in safety Features.

Technical Data	
Air pressure	6-12kgs/cm <sup>2</sup>
Max. wheel diameter	1350mm
Net weight	245kgs
Gross weight	280kgs

## 4400620

### Tyre Bench Spreader | sarv

Technical Data	
Size	L-640, W-315, H-270mm
Weight	14kg
Material	CRC Steel

**Unique Features :**

- TYRE BENCH SPREADER is used for inspection work by holding tyre beads apart while making section repairs on truck tyre.



• 4400620



• 4400620

## GTS-01

### Tyre Spreader for Commercial Vehicle Tyres | sarv

**Unique Features :**

- Ideal for quick and efficient tyre repairs on larger tyre sizes. For use with a manual wrench / ratchet wrench with 32 mm socket.

Technical Data	
Minimum jaw closure	25mm
Maximum jaw opening	325mm
Weight	2.7Kg



## 4400220

### Tyre Bench Spreader | sarv

**Unique Features :**

- Holds the tube and provides a smooth base for processing. Spreads Truck/Buses tyres. Can be mounted on work bench. Suitable for very long stiff beads. High stability & strength.

Technical Data	
Size	L-600mm, W-290mm, H-250mm
Weight	6.500kg
Material	CRC Steel



**1 SCB-4**




**2 SCR-42**




**3 SBP-5**



**4 SRD-24**



**5 SCTR2**



**5 SCTR3**

**1 Bias Tyre Repair Patches (Chemical Cure)**

Ply Rating:	Dia:	Qty/Box:	Code No.
4	160mm	10	SCB-4

**Use** : Permanent repair of the damage tyre.  
**Refer to Sarv Patches catalog for complete information.**

**2 Radial Tyre Repair Patches (Chemical Cure)**

Ply Rating:	Size:	Qty/Box:	Code No.
4	125x250mm	5	SCB-42

**Use** : Permanent repair of the damage tyre.  
**Refer to Sarv Patches catalog for complete information.**

**3 Bias Tyre Repair Patches (Dual Cure)**

Ply Rating:	Dia:	Qty/Box:	Code No.
4	170mm	10	SBP-5

**Use** : Permanent repair of the damage tyre.  
**Refer to Sarv Patches catalog for complete information.**

**4 Radial Tyre Repair Patches (Dual Cure)**

Ply Rating:	Size:	Qty/Box:	Code No.
2	90x220mm	10	SRD-24

**Use** : Permanent repair of the damage tyre.  
**Refer to Sarv Patches catalog for complete information.**

**5 Tube Patches (Chemical)**

Shape:	Size:	Qty/Box:	Code No.
Round	23mm	150	SCCP
Round	28mm	100	SCTR1
Round	30mm	50	SCTR2
Round	38mm	50	SCTR3
Round	48mm	25	SCTR4
Round	56mm	25	SCTR5
Round	75mm	25	SCTR6

**Refer to Sarv Patches catalog for complete information.**


**6 Tube Patches (Chemical)**

Shape:	Size:	Qty/Box:	Code No.
Oval	27X40mm	50	SCTO1
Oval	25X60mm	50	SCTO2
Oval	76X37mm	25	SCTO3
Oval	102X44mm	25	SCTO4

**Refer to Sarv Patches catalog for complete information.**



**6 SCTO1**

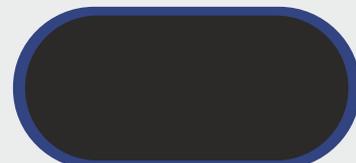

**6 SCTO2**



**7** 440127

**7 TUBELESS TYRE REPAIR MUSHROOM PATCHES**

Injury Size:	Patch Size:	Qty/Box:	Code No.
3mm	1/8"	40	440127
6mm	1/4"	40	440227
9mm	3/8"	40	440527

Refer to Sarv Patches catalog for complete information.



**8** SPS3

**8** SPS6

**8** SPS9

**8 TUBELESS TYRE REPAIR STEMS**

Injury Size:	Patch Size:	Qty/Box:	Code No.
3mm	1/8"	40	SPS3
6mm	1/4"	30	SPS6
9mm	3/8"	25	SPS9
13mm	1/2"	20	SPS13
18mm	3/4"	10	SPS18
25mm	1"	10	SPS25
30mm	1 1/4"	10	SPS30

Refer to Sarv Patches catalog for complete information.



**9** 44RS06

**9** 44RS07



**9 Repair Strings**

Colour:	Size (Flap):	Weight:	Code No.
Brown	2" long	3gms	44RS06
Brown	4" long	15gms	44RS07
Black	4" long	15gms	44RS07BK
Brown	8" long	25gms	44RS08
Black	8" long	25gms	44RS08BK

Packaging: 1 flap consists of 5 repair Strings.



**9** 44RS07BK



**9** 44RS08



**10** SC-704



**11** SC-713

**10 Chemical Vulcanizing Fluid (Sarv Sol)**

Quantity:	Qty/Box:	Code No.
75 ml Tube	20	SC-701
300 ml Tin	10	SC-703
1 Litre Tin	6	SC-704

Refer to Sarv Patches catalog for complete information.

**11 HD Chemical Cement (Sarv HD Blue)**

Quantity:	Qty/Box:	Code No.
300 ml Tin	10	SC-712
1 Litre Tin	6	SC-713

Refer to Sarv Patches catalog for complete information.



**12** SC-706



**13** SC-709

**12 Sarv Repair Sealer**

Quantity:	Qty/Box:	Code No.
1 Litre Tin	6	SC-706

Refer to Sarv Patches catalog for complete information.

**13 Sarv Bead Sealer**

Quantity:	Qty/Box:	Code No.
1 Litre Tin	6	SC-709

Refer to Sarv Patches catalog for complete information.

# BHEEM UNIVERSAL TYRE REPAIR KIT



S No.	Description	Packing	S No.	Description	Packing
1	Rear Exhaust Kit	85001	2	Nail extraction Plier	85028
2	Drill Chuck (Short Adaptor)	85002-S	1	Hammer	
3	Drill Chuck (Long Adaptor)	85002-L	1	1/2" Female FRL, 16bar	85029-16
4	Cone Rasp, 16 GRIT	85003-16	1	Recoil House (3/8")	
5	Cone Rasp, 36 GRIT	85003-36	1	QRC 3/8" Female, Reducer 1/2"m 3/8" F	
6	Round face Rasp, 16 GRIT	85004-16	1	1/4 " Male adaptor for QRC	
7	Round face Rasp, 36 GRIT	85004-36	1	Mechanical Hand Tyre spreader	4400620
8	Pencil Rasp, 16 GRIT	85005-16	1	Mask	85034
9	Pencil Rasp, 36 GRIT	85005-36	1	Goggles	85035
10	Cup Rasp, 36 GRIT	85006-36	1	Gloves	85036
11	Rotary Gouger	85007-50	1	Steel Scale, 12"	85037-12
12	Taper Point Skiver	85008	1	Tool Box	85038
13	Extra Curve Skiver	85009	1	Wooden Tyre stand	85039
14	Round Point Skiver	85010	1	CVF 200ml	SC-703
15	Spiral Cementing Tool	4400014	1	200ml cleaning agent	ST-ROM
16	Rubber Scrapper	440005BK	1	Vulgum	SRM-802
17	Stitcher	443861	1	Adhesive Solution	ST-TEM
18	Point End Burr	85011-3	1	Carbide Cutter, 3mm	85044-3
19	Router Carbide Burr	85012-3	1	Carbide Cutter,6mm	85044-6
20	Pencil Mounted Stone	85013	1	Low speed Pneumatic buffer	85045-L
21	Mushroom Mounted Stone 40MM	85014-40	1	High speed Pneumatic buffer	85046-H
22	Mushroom Mounted Stone 30MM	85014-30	1	Radial patch, SRD 20 90X130	SRD 20
23	Conical mounted stone	85015	1	Radial patch, SRD22 100X180	SRD 22
24	Encapsulated brush	85016	1	Radial patch, SRD24 90X220	SRD 24
25	3" Brush	850217	1	Radial patch, SRD26 100X250	SRD 26
26	Skiving brush	85018	1	Radial Patch, SRD33 110X135	SRD 33
27	Carbide Cutter, 10mm	85044-10	1	Radial patch, SRD35 125X150	SRD 35
28	Carbide Cutter, 13mm	85044-13	1	Radial patch, SRD40 110X200	SRD 40
29	Wire Puller	85021	2	Radial patch, SRD42 120X250	SRD 42
30	Electric drill machine, 13mm	85022-13	1	Radial patch, SRD44 135X330	SRD 44
31	Tyre Vulcanizing Machine	85023	1	Mushroom Patch Bias and radial, 3mm	440127
32	Cleaning brush	850217	3	Mushroom Patch Bias and radial, 6mm	440227
33	Scissors	85025	1	Mushroom Patch Bias Only, 9mm	440527
34	Screw Driver		1	Mushroom Patch Bias Only, 13mm	440627
35	Cutting Pliers	85027	1	Mushroom Patch Bias Only, 20mm	440727

# SOLUTIONS FOR

✓ Vehicle Garages

✓ Professional Tyre Shops

✓ Garage Equipment Manufacturers



Scan for Download Latest Catalog

## Wheel Balancing Accessories

IN HOUSE MANUFACTURING



Wheel Balancing Weight Plier  
110011 / 110101



Adhesive Weight Removing Plier  
110204



PCD Measuring Tool  
110025 / 110015



Sarv-Quick Locking Nut with Inserts  
WB403



Truck Adapter Kit Cones for Wheel Balancing  
11202281



Self Centering Cone  
11951854



Wheel Clamping Cup  
1104060 / 1104070



Rim Width Caliper (for Trucks)  
1100010



Wheel Balancing Weights for Alloy Rims and Steel Rims



Wheel Balancing Sticker Weights for Alloy Rims  
1100058 / 1100050

## Wheel Alignment Accessories

IN HOUSE MANUFACTURING



Wheel Clamp for Measuring Head  
5521024



Finger Tools (Claws) for Wheel Clamp  
550127 / 550227 / 550218



Mechanical Turn Table with Scale  
1100317



Mechanical Turn Table with Scale, Ramp  
1101117



Mechanical Turn Table (Heavy Duty)  
1100217



Wheel Clamp for Measuring Head  
5531024



Brake Pedal Depressor  
111184



Steering Wheel Holder  
112384



Rubber Wheel Chock  
553004 / 554504



Rubber Wheel Chock  
551904

## Tyre Changing Accessories

IN HOUSE MANUFACTURING



Wheel Flange Loosener  
220204 / 2202045



Lug Nut Cap Puller  
220057 / 220067



Double Ended Wheel Wrench for Trucks  
2227336 / 2230336




Four Way Wheel Nut Wrench for Trucks  
2200014



Clamping Jaws for Truck Tyre Changers  
2220688

# MANUFACTURING AND EXPORTS TO **70+** COUNTRIES SINCE **1991**

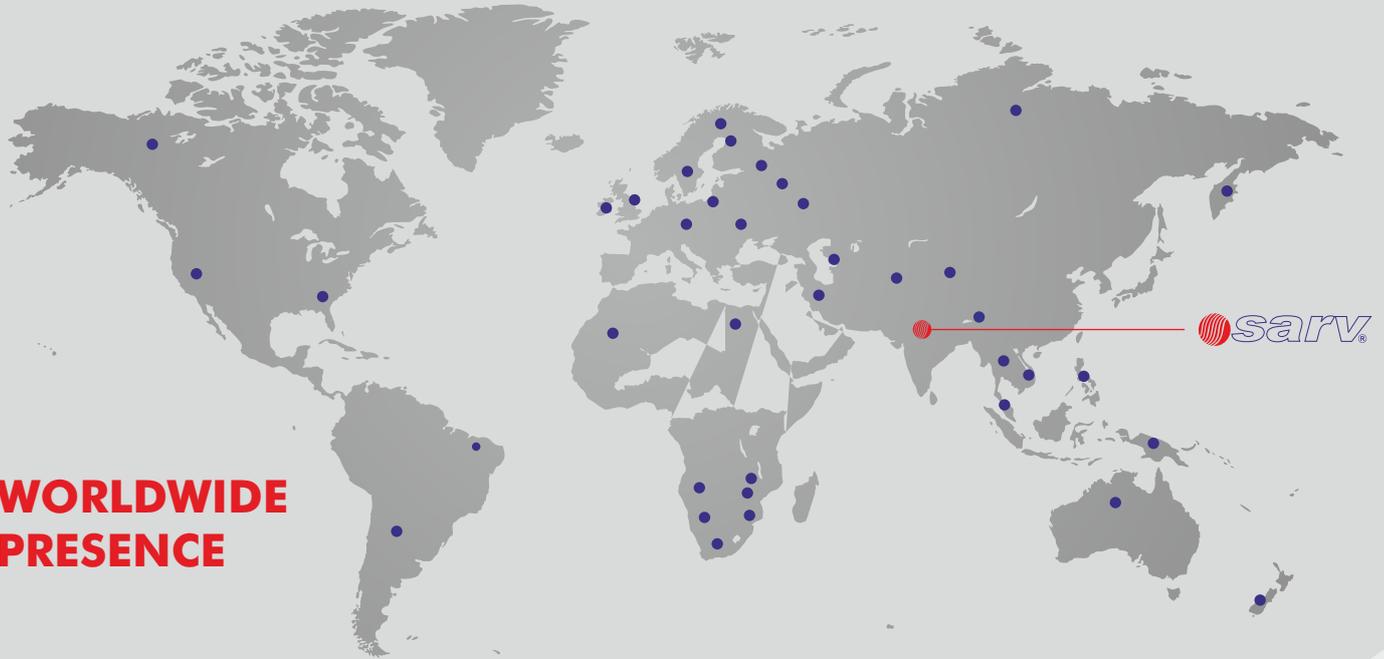

**WORLDWIDE  
PRESENCE**

FULL RANGE OF  
**GARAGE ACCESSORIES**  
by  **sarv**

**INDIA'S FIRST E-OUTLET**  
**ORDER ONLINE**  
[@www.garageequipments.com](http://www.garageequipments.com)



Professional Tyre Tools & Equipments Since 1991

## **Sarveshwari Technologies Ltd.**

B-287, Mangolpuri Industrial area phase-1, Mangolpuri, Delhi - 110 083 (India)  
Tel.: 91-11-27915432, 91-11-27915987  
Toll Free Helpline : 1800-11-3750  
Web: [www.garageequipments.com](http://www.garageequipments.com)  
E-mail : [info@garageequipments.com](mailto:info@garageequipments.com)



or Log on to  
[www.garageequipments.com](http://www.garageequipments.com)



or Like our  
Facebook Page  
Sarveshwari Technologies Limited



or Subscribe to our  
YouTube Channel  
Sarveshwari Technologies Limited